DART SERVICE INSTRUCTION

TO AMEND INSTALLATION INSTRUCTIONS IIN-D407-797-1 REV. B, IIN-D206-797-2 REV. B, AND INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ICA-D407-797 REV. 1

REF TCCA STC: SH11-1 REF FAA STC: SR02996NY REF EASA STC: 10035429

1.0 PURPOSE

This Dart Service Instruction (DSI) provides parts and instructions for modifying a D407-797-011/-012/-013/-014 or D206-797-021/-022/-023/-024 Heli-Utility-Basket at CHG 003 or earlier to close an opening at the top inboard side of the basket base assembly.

Customers who wish to implement this change can procure the DSI 9620-011 Blanking Plates Kit from Dart.

There are 2 different options to this modification. At the discretion of the installer, the D4672-1 Blanking Plates can be riveted or welded to the basket base. Refer to Section 2.0 of this service instruction if the blanking plates are to be riveted to the base assembly. Refer to Section 3.0 if the blanking plates are to be welded to the base assembly. Note: This modification has been incorporated at a manufacturing level on D407-797-011/-012/-013/-014 and D206-797-021/-022/-023/-024 Heli-Utility-Baskets at CHG 004 and later.

2.0 MODIFICATION PROCEDURE (RIVET)

- 2.1 Remove basket from aircraft per Section 25.1 of ICA-D407-797.
- Remove basket lid per Section 25.6 of ICA-D407-797.
- 2.3 Locate D4672-1 Blanking Plates on basket base as shown in View A-A on sheet 3 of this service instruction.
- 2.4 Drill Ø0.128" through D4672-1 Blanking Plates and top of basket tubular structure as indicated in View
- A-A on Sheet 3 of this service instruction. Deburr tubular structure and blanking plates.

 2.5 At the discretion of the installer, the D4672-1 Blanking Plates can be painted to match the basket finish in accordance with Section 5.2.5 of ICA-D407-797.
- Install the D4672-1 Blanking Plates using provided rivets. At the discretion of the installer, the rivets and blanking plates can be installed wet using Sikaflex-241/-291 or Proseal 890 or MIL-S-8802 Class 'B2' sealant.

 2.7 Re-install lid on basket base per Section 25.6 of ICA-D407-797.

 2.8 Re-install basket on aircraft per Section 25.2 of ICA-D407-797.

3.0 MODIFICATION PROCEDURE (WELDING)

- 3.1 Remove basket from aircraft per Section 25.1 of ICA-D407-797.3.2 Remove basket lid per Section 25.6 of ICA-D407-797.
- 3.3 Prepare surface of basket base where the blanking plates will be installed by removing the finish locally.
- 3.4 Locate D4672-1 Blanking Plates on basket base as shown in View A-A on Sheet 4 of this service instruction and weld the blanking plates to the basket tubular structure per MIL-STD-2219/AMS-STD-2219 Class 'C' using ER308L or ER316L filler rod.
- 3.5 Paint re-worked area per Section 5.2.5 of ICA-D407-797
- 3.6 Re-install lid on basket base per Section 25.6 of ICA-D407-797.
- 3.7 Re-install basket on aircraft per Section 25.2 of ICA-D407-797.

CANADA DEPARTMENT OF TRANSPORT AIRCRAFT CERTIFICATION BRANCH DAO # 01-O-01 APPROVED D. SHEPHERD (DE # 02) DATE: CERT. NO.: ISSUE NO .:

Α	NEW ISSUE MB			12.06.19		
REV.		1		DESCRIPTION	BY	DATE
DESIGN	DESIGN		1	DART AEROSPACE LTD		
DRAWN			<u> </u>	HAWKESBURY, ONTAR	IO, CANA	NDA
CHECK	ED	A.	D.	DRAWING NO.		REV. A
MFG. A	PPR.	'n.	\triangle	DSI 9620		SHEET 1 OF 4
APPRO	VED	1		TITLE		SCALE
DE APPR.		-		BASKET MODIFICAT	ION	NTS
DATE 12.06.19)	COPYRIGHT © 2012 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND COMPIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED ON COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.		

4.0 WEIGHT CHANGE

There is a negligible weight change associated with this modification.

5.0 PARTS LIST

QTY -011	PART NUMBER	DESCRIPTION
Х	DSI 9620-011	BLANKING PLATE KIT
2	D4672-1	BLANKING PLATE
14	CR3523-4-02	RIVET

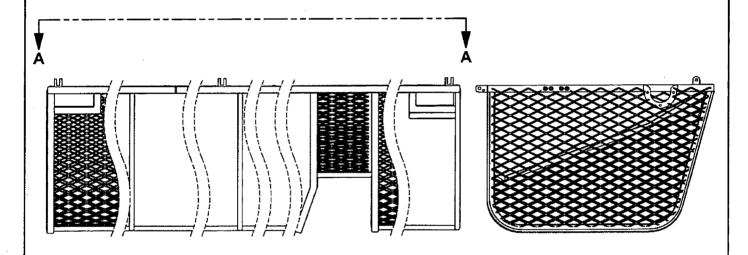


FIGURE 1: BASKET BASE OVERVIEW

(MESH SHOWN PARTIALLY FOR CLARITY) (D407-797-011/-013 OR D206-797-021/-023 BASKET BASE SHOWN, D407-797-012/-014 OR D206-797-022/-024 BASKET BASE OPPOSITE)


CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED
BY:
D. SHEPHERD (DE # 02)

DATE: 12.06.28

DATE:	12.06.28
CERT. NO.:	SH11-1
ISSUE NO.:	2

	1.		
DESIGN		DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN			
CHECKED	A.!?	DRAWING NO.	REV. A
MFG. APPR.	U/A	DSI 9620	SHEET 2 OF 4
APPROVED	AM.	TITLE	SCALE
DE APPR.		BASKET MODIFICATION	NTS
DATE -12.0)6.19	COPYRIGHT © 2012 BY DART AEROSPACE 1-TO— THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OF COPIED OR COMMANDIATED TO ANY OTHER PERSON WITHOUT	

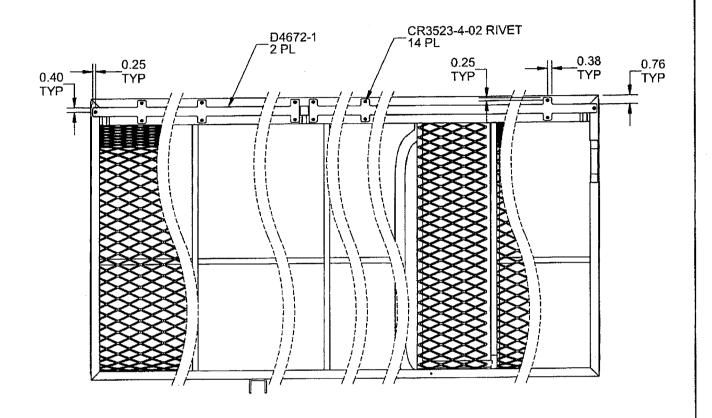

VIEW A-A: RIVET OPTION

(REF. FIGURE 1 AND SECTION 2.0 OF THIS SERVICE INSTRUCTION)
(MESH SHOWN PARTIALLY FOR CLARITY)
(D407-797-011/-013 OR D206-797-021/-023 BASKET BASE SHOWN,
D407-797-012/-014 OR D206-797-022/-024 BASKET BASE OPPOSITE)

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01


BY: D. SHEPHERD (DE # 02)

DATE: 12.06.28

CERT. NO.: SH11-1

ISSUE NO.: 2

DESIGN		DART AEROSPACE LTD		
DRAWN		HAWKESBURY, ONTARIO, CANADA		
CHECKED	A.D.	DRAWING NO.	REV. A	
MFG. APPR.	N/AO	DSI 9620	SHEET 3 OF 4	
APPROVED	NA PAR	TITLE	SCALE	
DE APPR.	#	BASKET MODIFICATION	NTS	
DATE 12 (06.19	COPYRIGHT © 2012 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS THE DAY CHIEF PERSON WITHOUT		

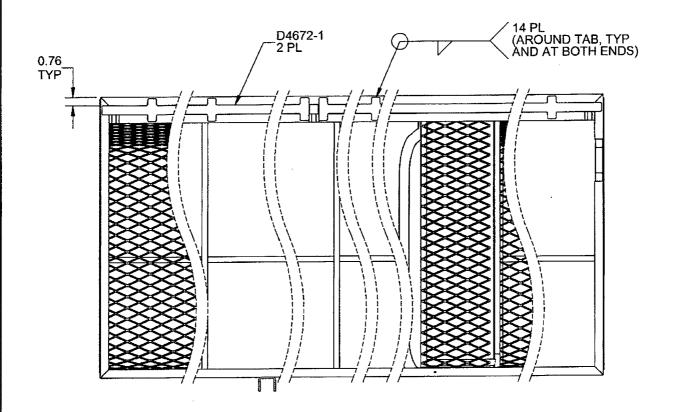

VIEW A-A: WELDING OPTION

(REF. FIGURE 1 AND SECTION 3.0 OF THIS SERVICE INSTRUCTION)
(MESH SHOWN PARTIALLY FOR CLARITY)
(D407-797-011/-013 OR D206-797-021/-023 BASKET BASE SHOWN,
D407-797-012/-014 OR D206-797-022/-024 BASKET BASE OPPOSITE)

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

BY: MB (DE # 02)

DATE: 12.06.28
CERT. NO.: SH11-1
ISSUE NO.: 2

DESIGN		DART AEROSPACE	LTD
DRAWN A		HAWKESBURY, ONTARIO, CANADA	
CHECKED	A.V.	DRAWING NO.	REV. A
MFG. APPR.	N/A	DSI 9620	SHEET 4 OF 4
APPROVED	CAR	TITLE	SCALE
DE APPR.	#	BASKET MODIFICATION	· NTS
DATE 12.0	06.19	COPYRIGHT © 2012 BY DART AEROSPA. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPR. NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY.	RESS CONDITION THAT IT IS